

VALVES

QV-4080 VALVE, CHECK

10mm OD tube with a precision ground seat and a 1/8" ceramic ball. Hose connections at top and bottom.

Code
-110




VISCOMETERS

QV-5000 VISCOMETER, CANNON-FENSKE ROUTINE

ASTM D445 and D2515 for use in obtaining kinematic viscosities. This instrument is both rugged and easy to operate, it is the most widely used viscometer in the petroleum industry. Requires a minimum bath depth of 8 inches and a sample of approximately 7ml. Supplied calibrated at 40° C and 100° C with certificate or uncalibrated.

<u>Size</u>	<u>Nominal Constant</u>	<u>Viscosity Range cSt.</u>	<u>Calibrated Code</u>	<u>Uncalibrated Code</u>
25	0.002	0.4 to 2	-110	-224
50	0.004	0.8 to 4	-111	-225
75	0.008	1.6 to 8	-112	-226
100	0.015	3 to 15	-113	-227
150	0.035	7 to 35	-114	-228
200	0.1	20 to 100	-115	-229
300	0.25	50 to 200	-116	-230
350	0.5	100 to 500	-117	-231
400	1.2	240 to 1200	-118	-232
450	2.5	500 to 2500	-119	-233
500	8.0	1600 to 8000	-120	-234
600	20.0	4000 to 20000	-121	-235
650	45.0	9000 to 100000	-122	-236
700	100.0	20000 to 100000	-123	-237

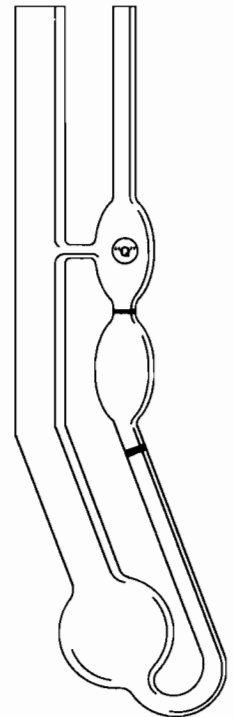

REMEMBER

“Q” Glass has been working with customers to design and build custom glass apparatus and component parts since 1946. We can do the same for you. Please write or call us with your special requirements.